




WEB STIFFENERS REQUIRED  
IF SIDES OF HANGER DO NOT  
LATERALLY SUPPORT AT  
LEAST 3/8" OF TJI® JOIST TOP  
FLANGE

TREATED SILL OR STRANDGUARD® TIMBERSTRAND® LSL  
• FLOOR SHEATHING MUST ATTACH TO THE TJI® JOIST  
AND TREATED MUD SILL; CONNECTION PER DORE/EOR

**LEDGER:** USE MINIMUM 1-1/4"  
1.3E TIMBERSTRAND® LSL RIM  
BOARD WITH VAPOR BARRIER  
OR EQUIVALENT  
• LEDGER CONNECTION  
SPECIFIED PER DORE/EOR

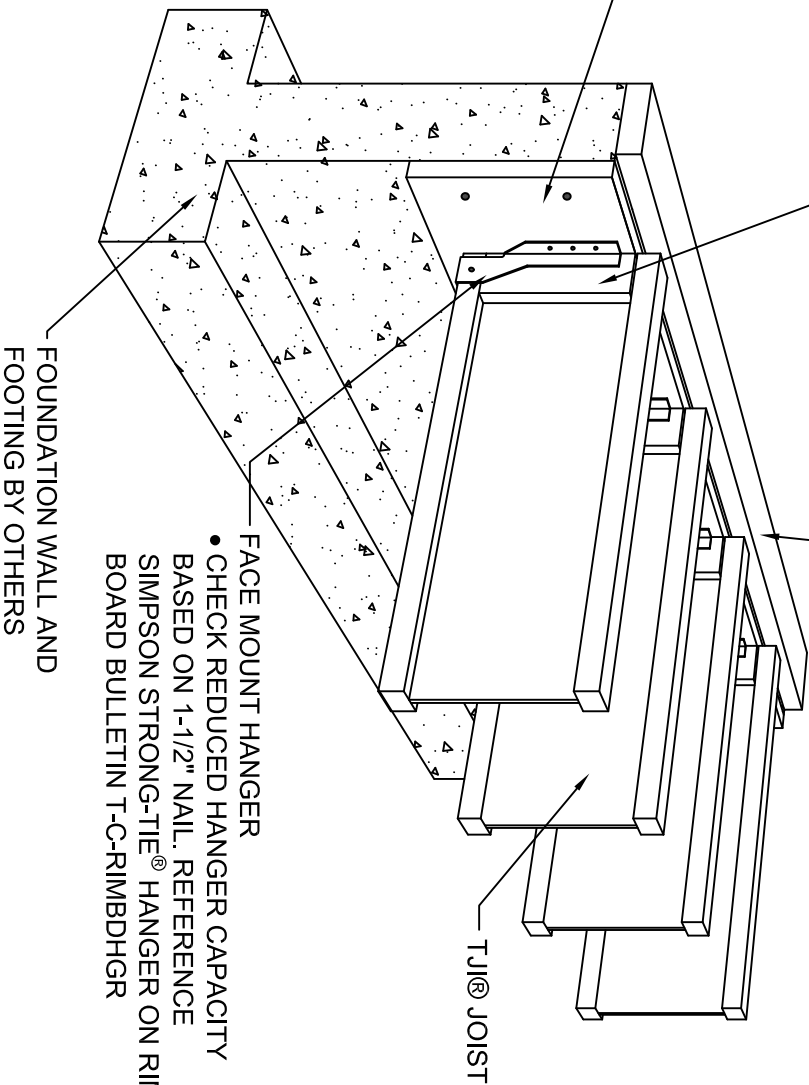

FACE MOUNT HANGER  
• CHECK REDUCED HANGER CAPACITY  
BASED ON 1-1/2" NAIL. REFERENCE  
SIMPSON STRONG-TIE® HANGER ON RIM  
BOARD BULLETIN T-C-RIMBDHGR

## TIMBERSTRAND® LSL LEDGER ON CONCRETE

EXPIRATION DATE:  
01-01-2023

We warrant that the drawings and specifications are true and correct as shown. We do not warrant that the drawings and specifications are complete. The user is solely responsible for the design and construction of the project. The user is responsible for obtaining all necessary permits and approvals. The user is responsible for ensuring that the drawings and specifications are followed as shown. The user is responsible for ensuring that the drawings and specifications are followed as shown. The user is responsible for ensuring that the drawings and specifications are followed as shown.

REV	DATE	COMMENTS

PROJECT #:  
SERVICE #:

SHEET #:

NW-D207