


LEAVE 1/2" GAP MINIMUM BETWEEN THE END OF THE JOIST AND CONCRETE, OR USE MOISTURE BARRIER

CONNECT TJI® TO PLATE PER TJI-4000

BLOCKING PANELS OR ALTERNATE FORM OF LATERAL SUPPORT MUST BE IN PLACE DURING INSTALLATION TO PREVENT ROTATION

FOUNDATION WALL AND FOOTING BY OTHERS
 • TO BE CHECKED FOR LOAD APPLIED OUTSIDE OF CENTERLINE BY EOR

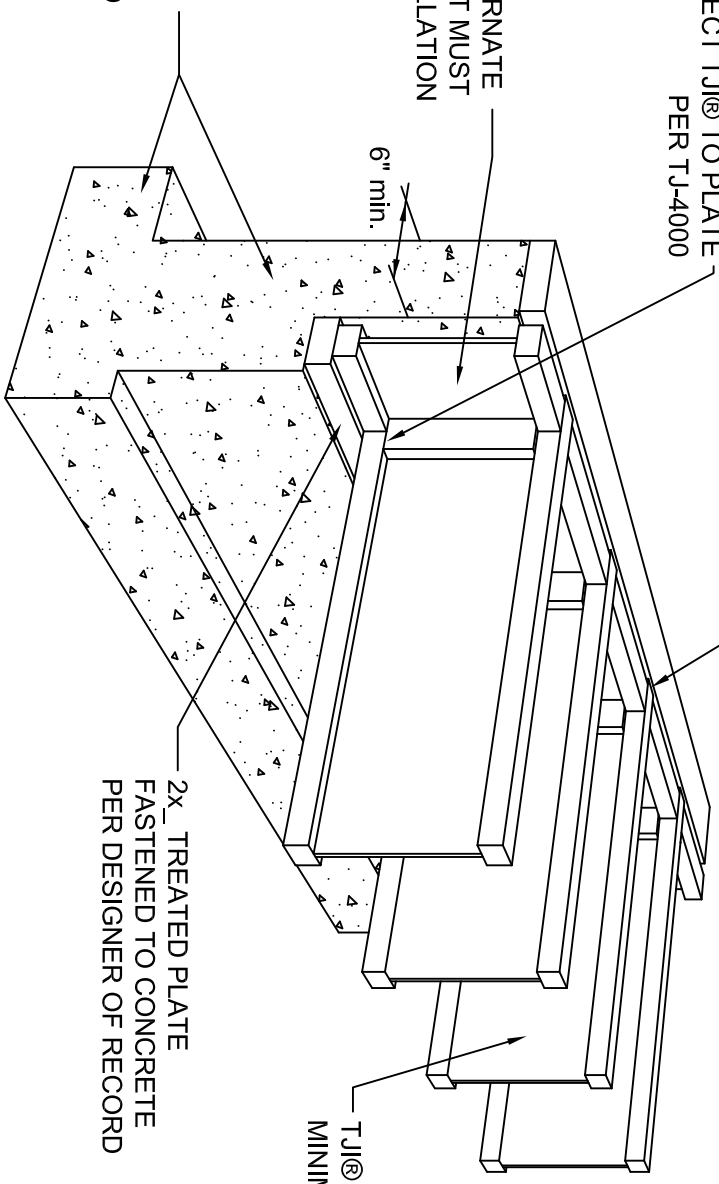

TJI® JOIST WITH 1.75" MINIMUM BEARING

2X TREATED PLATE FASTENED TO CONCRETE PER DESIGNER OF RECORD

Trus Joist Product Technical Support
 Phone: (888) 453-8358
 Email: techsupport@weyerhaeuser.com

NOTE: FLOOR SHEATHING (NOT SHOWN FOR CLARITY) MUST ATTACH TO THE TJI® JOIST AND TREATED MUD SILL (CONNECTION PER DESIGNER)



Weyerhaeuser prepared this drawing for the project. Information provided to us. This service shall be provided as a courtesy and does not constitute a contract. We are not intended to represent the need for a design, which shall be determined by the building code, applicable to the project. It is the responsibility of the user to ensure that drawings are compatible with the code of the project. Copyright 2008 Weyerhaeuser Corporation. All reproduction will constitute an infringement of copyright.

TJI® JOISTS SUPPORTED BY TREATED PLATE ON CONCRETE CORBEL

EXPIRATION DATE:
01-01-2023

REV	DATE	COMMENTS

PROJECT #:

SERVICE #:

SHEET:

NW-D218