


TJI® BLOCKING PANELS

SQUASH BLOCKING

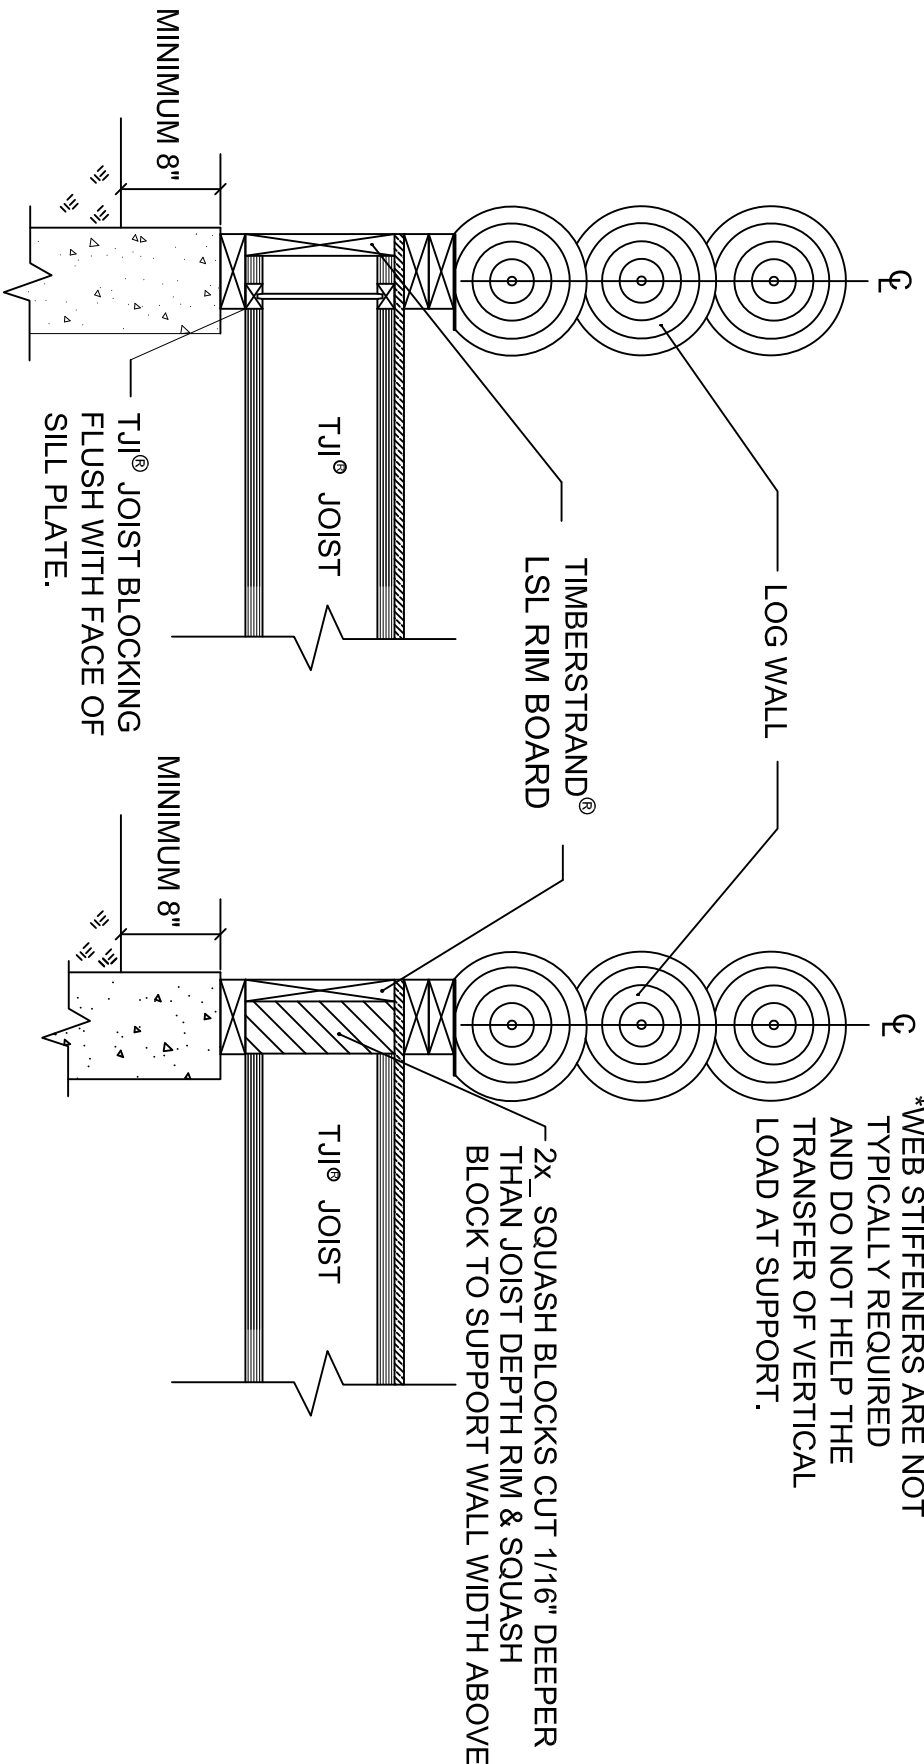

*WEB STIFFENERS ARE NOT TYPICALLY REQUIRED AND DO NOT HELP THE TRANSFER OF VERTICAL LOAD AT SUPPORT.

2x SQUASH BLOCKS CUT 1/16" DEEPER THAN JOIST DEPTH RIM & SQUASH BLOCK TO SUPPORT WALL WIDTH ABOVE

VERTICAL LOAD CAPACITY:

- 1-1/4" 1.3E TIMBERSTRAND® LSL = 5,000 PLF (16" DEEP OR LESS)
- 1-3/4" 1.3E TIMBERSTRAND® LSL = 7,560 PLF (20" DEEP OR LESS)
- TJI® JOIST BLOCKING = 2,100 PLF
- SQUASH BLOCKS = 4,050 LBS PER PAIR

NOTE: WHEN THE CENTER LINE OF A LOG WALL EXTENDS FARTHER INTO THE SPAN OF THE JOIST THAN THE TYPICAL 2x4 OR 2x6 WALL, ADDITIONAL BLOCKING IS RECOMMENDED. THIS HELPS TRANSFER VERTICAL LOAD AND PREVENTS POTENTIAL CRUSHING OF THE JOIST. THE CENTER LINE MAY NOT EXTEND PAST THE INSIDE FACE OF ADDED MATERIAL.



We warrant that the drawings and specifications are true and correct to the best of our knowledge and belief. This warranty is void if the drawings and specifications are not followed as shown. The manufacturer is not responsible for any errors or omissions. The manufacturer is not responsible for any damage to property or injury to persons resulting from the use of the drawings and specifications. The manufacturer is not responsible for any damage to property or injury to persons resulting from the use of the drawings and specifications. The manufacturer is not responsible for any damage to property or injury to persons resulting from the use of the drawings and specifications.

RECOMMENDED SUPPORT FOR LOG WALL

EXPIRATION DATE: 01-01-2023

| REV | DATE | COMMENTS |
|-----|------------|-------------------------|
| 1 | 2016-02-08 | Updated TitleBlock (JM) |
| | | |
| | | |
| | | |
| | | |

Trus Joist Product Technical Support
 Phone: (888) 453-8358
 Email: techsupport@weyerhaeuser.com

* FOR PARALLEL SIDES, RUN A SECOND RIM BOARD ON THE INSIDE EDGE OF SILL PLATE.

SHEET: NW-D206

SERVICE #:

PROJECT #: