


JOIST MAY BE SHIFTED UP TO 3". DO NOT DAMAGE JOIST FLANGES WHEN CUTTING PLUMBING DROP.

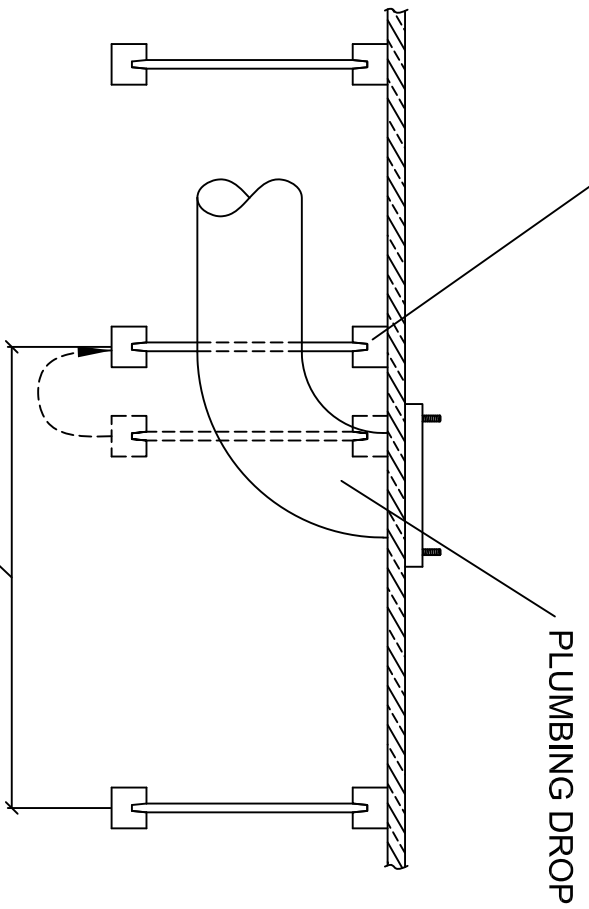

24" MAX SPACING BETWEEN JOISTS. ADDITIONAL JOIST MAY BE REQUIRED TO SUPPORT FLOOR PANEL EDGES IF PANEL SPAN RATING IS EXCEEDED.

INSTALLATION TIPS

- ALTERNATE OPTIONS INCLUDE INSTALLATION OF OFFSET TOILET FLANGE, OR JOIST HEADER OFF AROUND PLUMBING. REFER TO TB-319 FOR HEADER OFF DETAILS.
- ENSURE HOLES CUT INTO JOIST WEB COMPLY WITH TJI HOLE CHART, AVAILABLE IN TJ-4000 OR THE TJI FRAMERS POCKET GUIDE.
- USE CONSTRUCTION ADHESIVE AT ALL CONTACT SURFACES.



Weyerhaeuser is providing this drawing for the information provided to you. This service is not intended to constitute a contract or a design. The design is determined by the building code, applicable to the project. It is the responsibility of the contractor to ensure that drawings are consistent with the code of practice. Copyright © 2019 Weyerhaeuser Corporation. All reproduction and distribution are subject to the terms and conditions of the license agreement.

PLUMBING DROP DETAIL

EXPIRATION DATE: **01-01-2023**

PROJECT #:

SERVICE #:

SHEET:

NW-D223